



EDISON LIGHTING

Architect's Choice



Offices- Bangalore/Hyderabad
Phone No- 9731196786/9666666808

CARBON POLYMER
Lamp Profile
2025



Colors available against order

Metal Series



Fabric Texture Series



Leather Grain Series




Tiles Texture Series




Wood Grain Series




Soft Touch Series

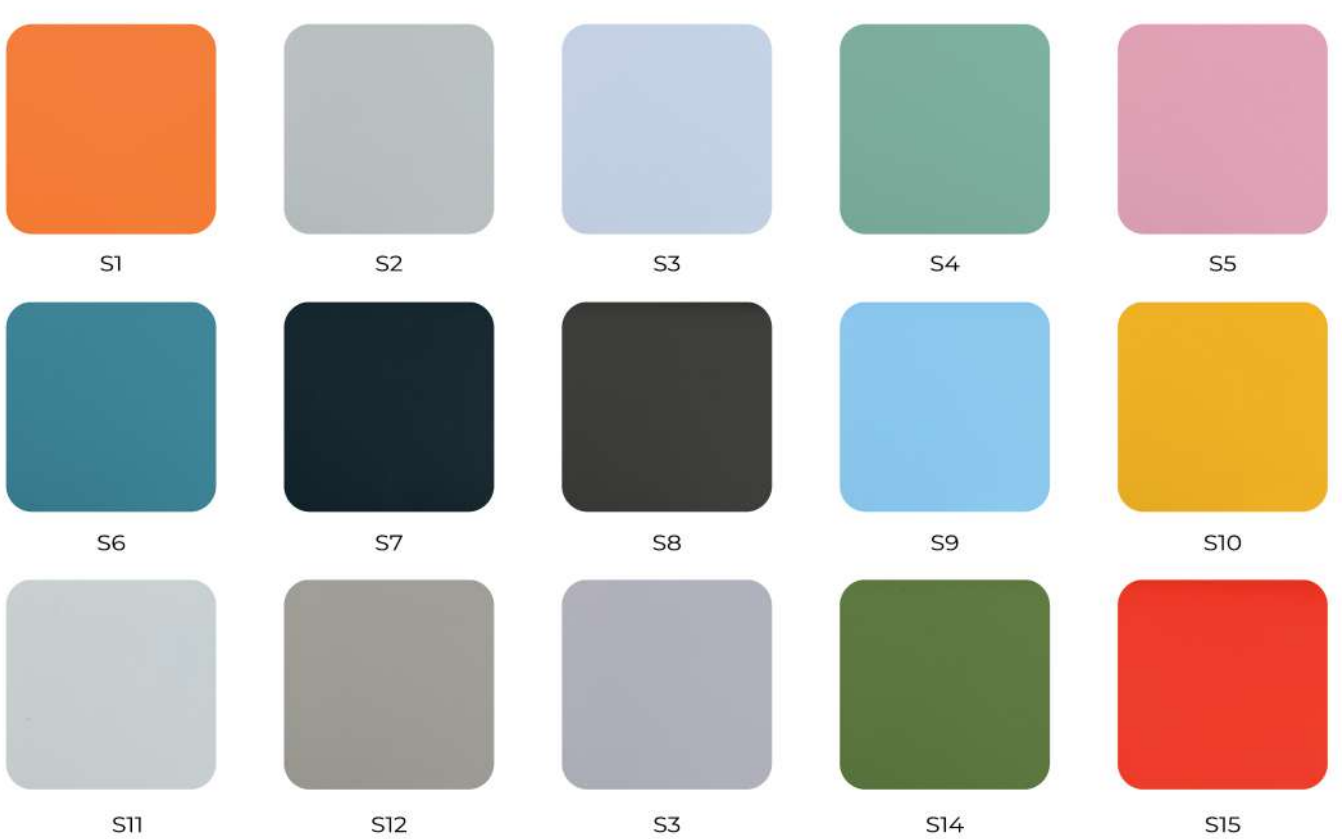


More 300 Finish Available Against Order

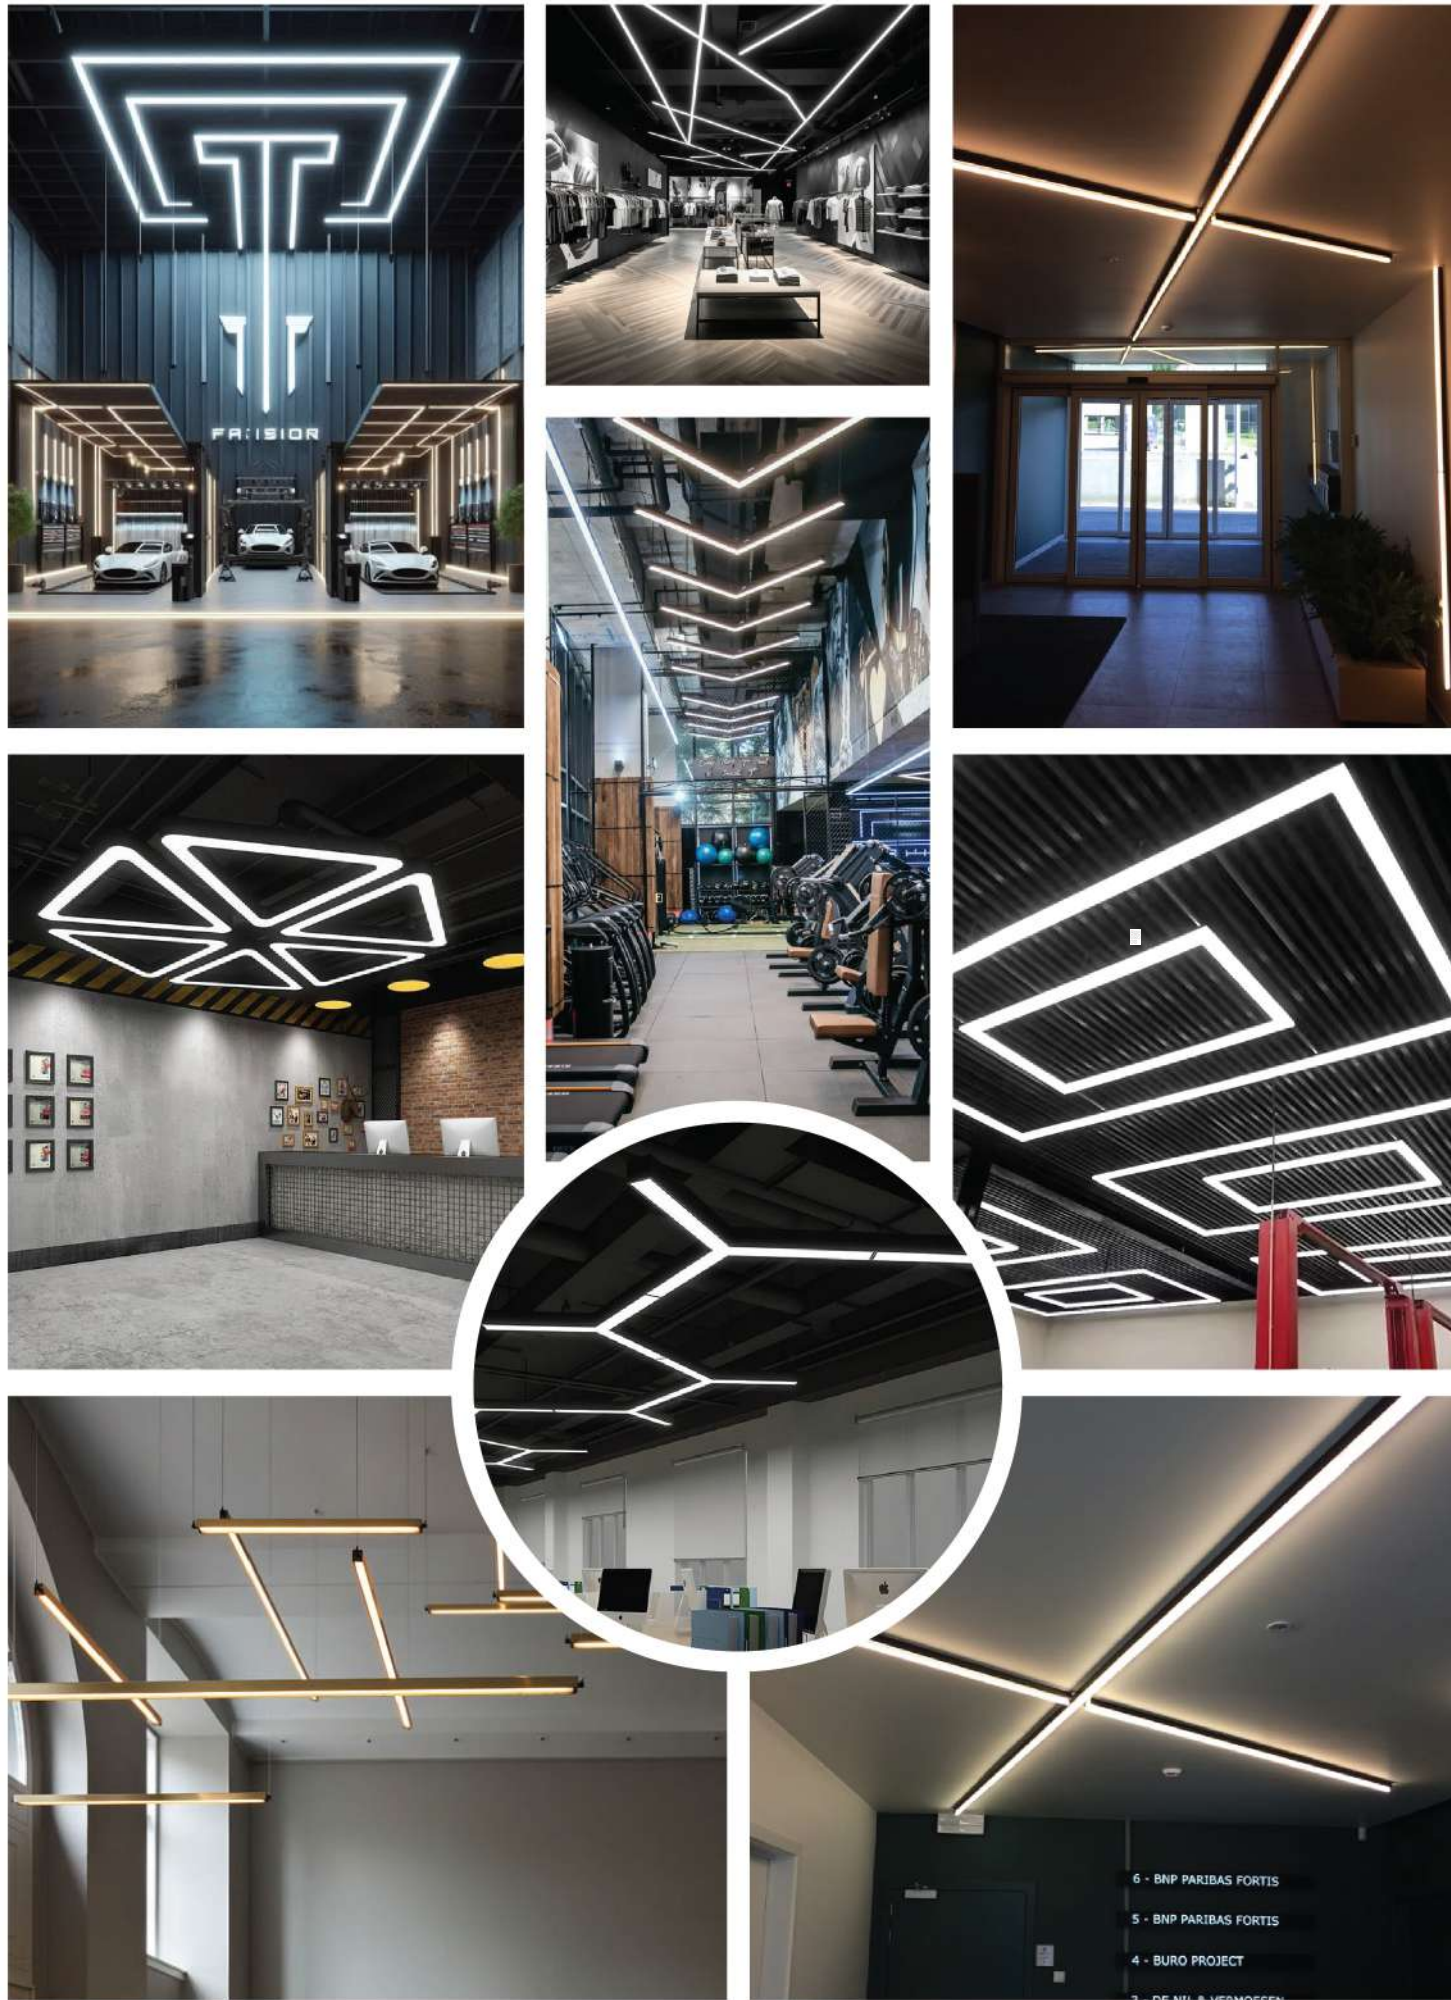


• Accessories

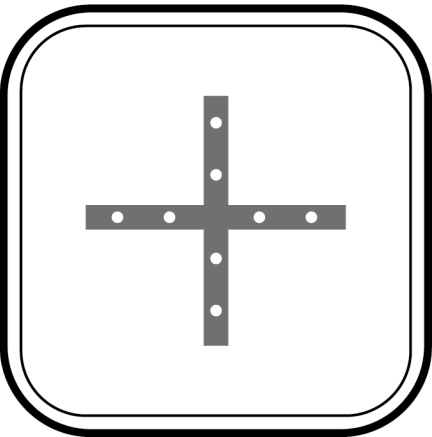


Plus Connector

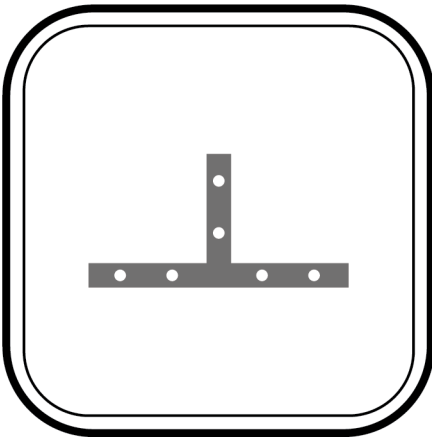


T Connector

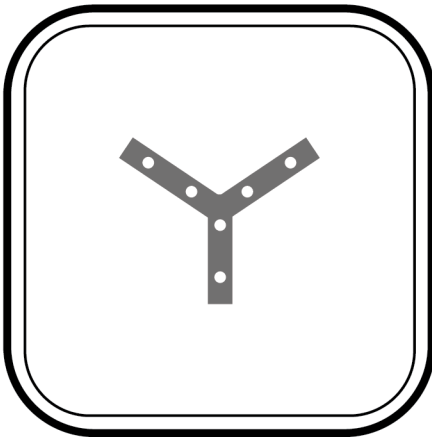


Y Connector

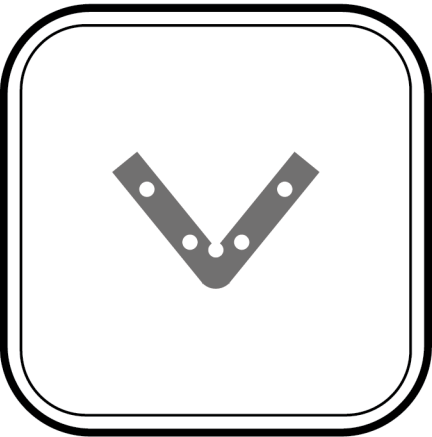


60° Connector

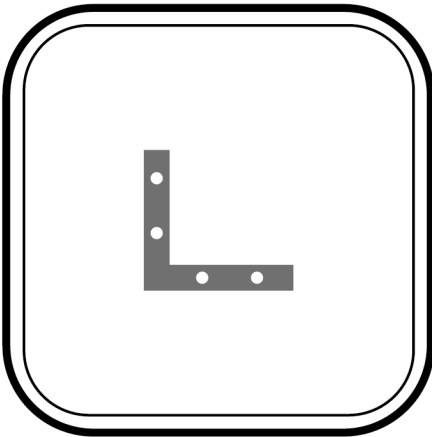


90° Connector

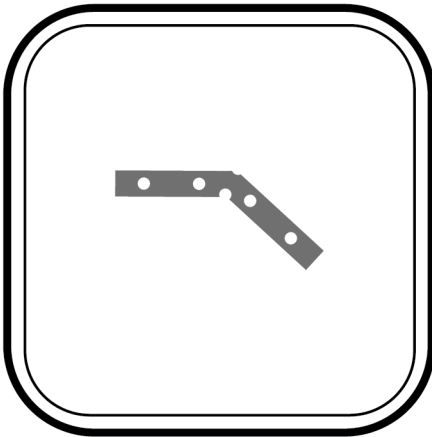

120° Connector


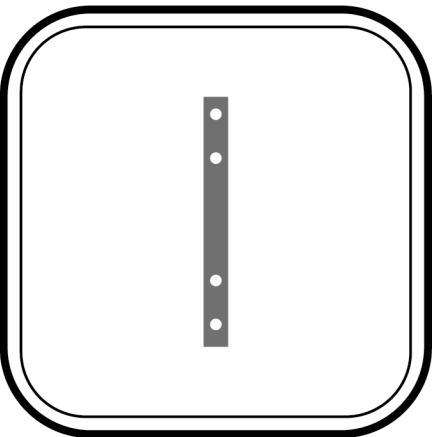


Connector

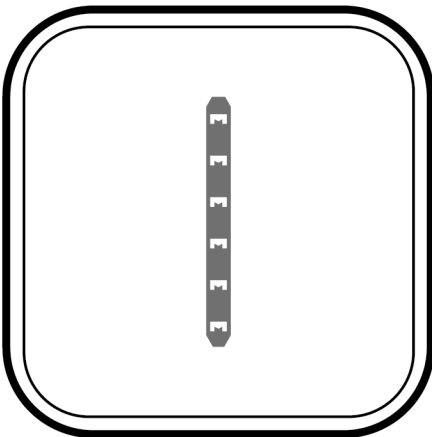


Hanging Connector

SB-3570

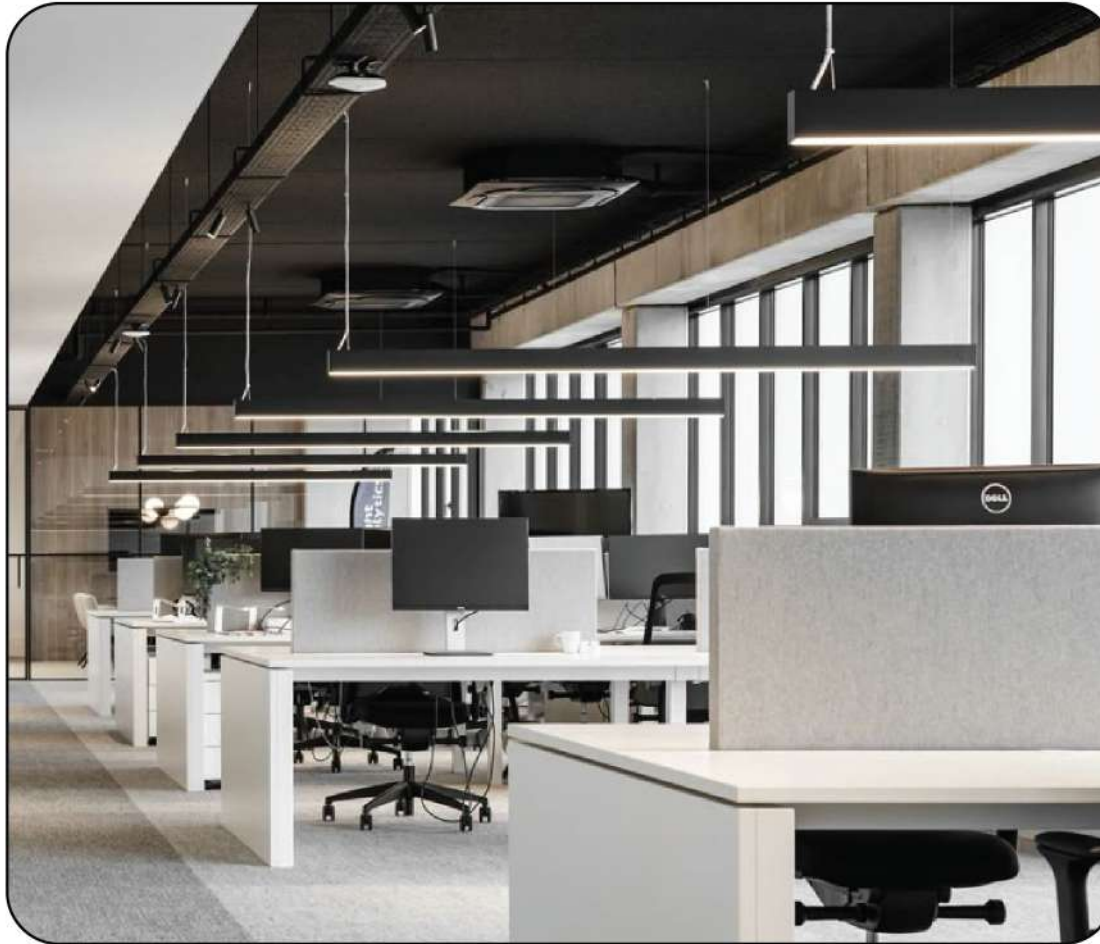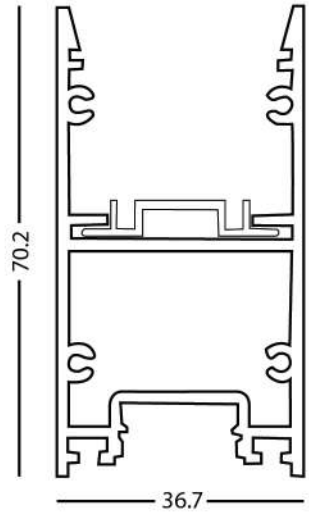

FAMILY MODULES CONFIGURATIONS:

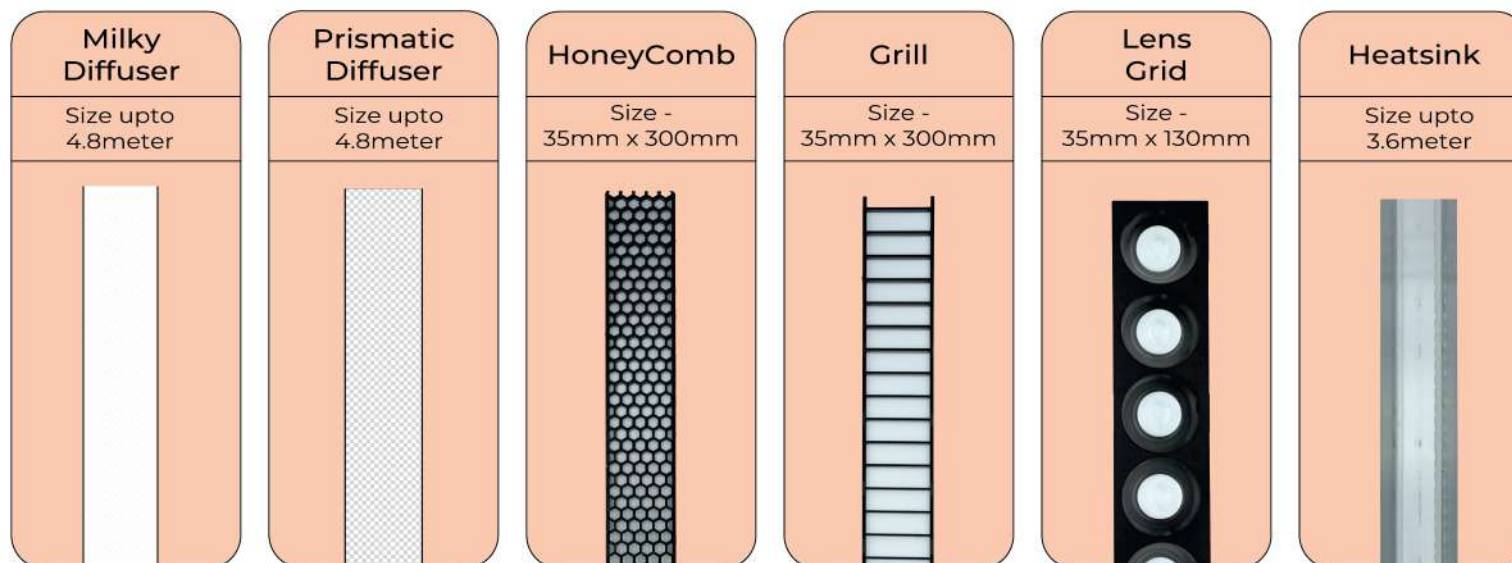

- CCT:**
 - 3000k
 - 4000k
 - 6000K
 - 3000k-6000k

Available Wire Color:

- Black
- White
- Clear

Hanging Kit Color:

- Black
- Clear

Input Voltage:

110v-240v / 50-60Hz

Wattage Range:

24v-43v 1000Ma (4ft)

Operating Temperature:

Capacity Upto 85°C

Beam Angle:

24° - 120°

CRI:

Ra≥90

Lumens:

110lums - 130lums
(3000k) - (6500k)

Wattage:

40w/60w (4ft)

Power Factor:

0.50/0.90


Sizes Available:

1ft-16ft

Drivers:




Product Technology:




LED Engine:



Available Finish:



Sand Black



Sand White



Hermes Leather



Cherry Wood



White Oak



Rose Wood




Antique Brass




Antique Copper

More
300 Finish
Available
Against Order

SB-5080

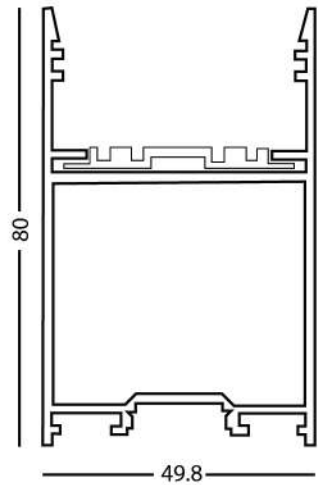

FAMILY MODULES CONFIGURATIONS:

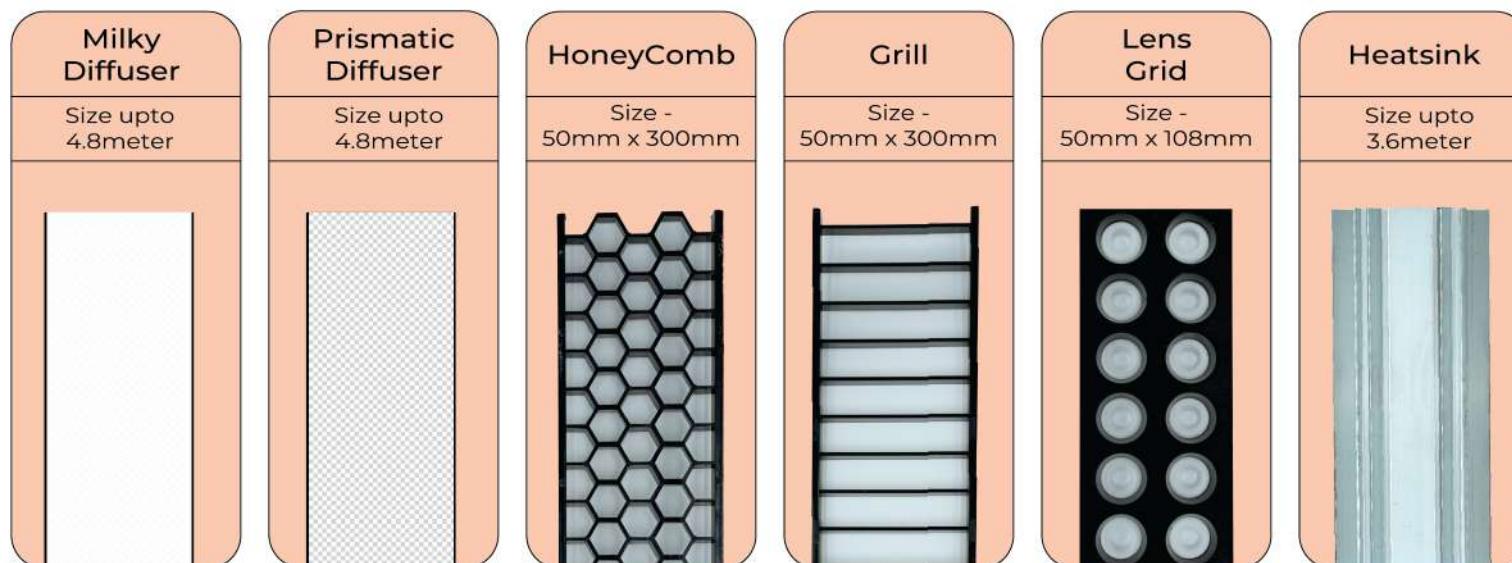

- CCT:**
 - 3000k
 - 4000k
 - 6000K
 - 3000k-6000k

Available Wire Color:

- Black
- White
- Clear

Hanging Kit Color:

- Black
- Clear

Input Voltage:

110v-240v / 50-60Hz

Wattage Range:

24v-43v 1000Ma (4ft)

Operating Temperature:

Capacity Upto 85°C

Beam Angle:

24° - 120°

CRI:

Ra≥90

Lumens:

110lums - 130lums
(3000k) - (6500k)

Wattage:

40w/60w (4ft)

Power Factor:

0.50/0.90

Sizes Available:

1ft-16ft

Drivers:



2 Years Warranty



4 Years Warranty



4 Years Warranty


Product Technology:




LED Engine:



Available Finish:



Sand Black



Sand White



Hermes Leather



Cherry Wood



White Oak



Rose Wood




Antique Brass



Antique Copper

More
300 Finish
Available
Against Order

SB-7075

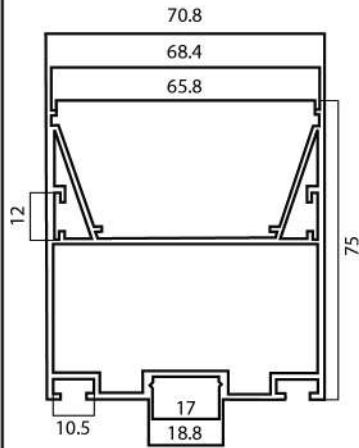

- **CCT:**
 - 3000k
 - 4000k
 - 6000K
 - 3000k-6000k

Available Wire Color:

- Black
- White
- Clear

Hanging Kit Color:

- Black
- Clear

- **Input Voltage:**
110v-240v / 50-60Hz

- **Wattage Range:**
24v-43v 1000Ma (4ft)

- **Operating Temperature:**
Capacity Upto 85°C

- **Beam Angle:** 120°
- **CRI:** Ra≥90

- **Lumens:**
110lums - 130lums
(3000k) - (6500k)

- **Wattage:**
40w/60w (4ft)

- **Power Factor:**
0.50/0.90

- **Sizes Available:**
1ft-16ft

Drivers:




Product Technology:




LED Engine:



Available Finish:



Sand Black



Sand White



Hermes Leather



Cherry Wood



White Oak



Rose Wood






Antique Brass



Antique Copper

More
300 Finish
Available
Against Order

SB-8075

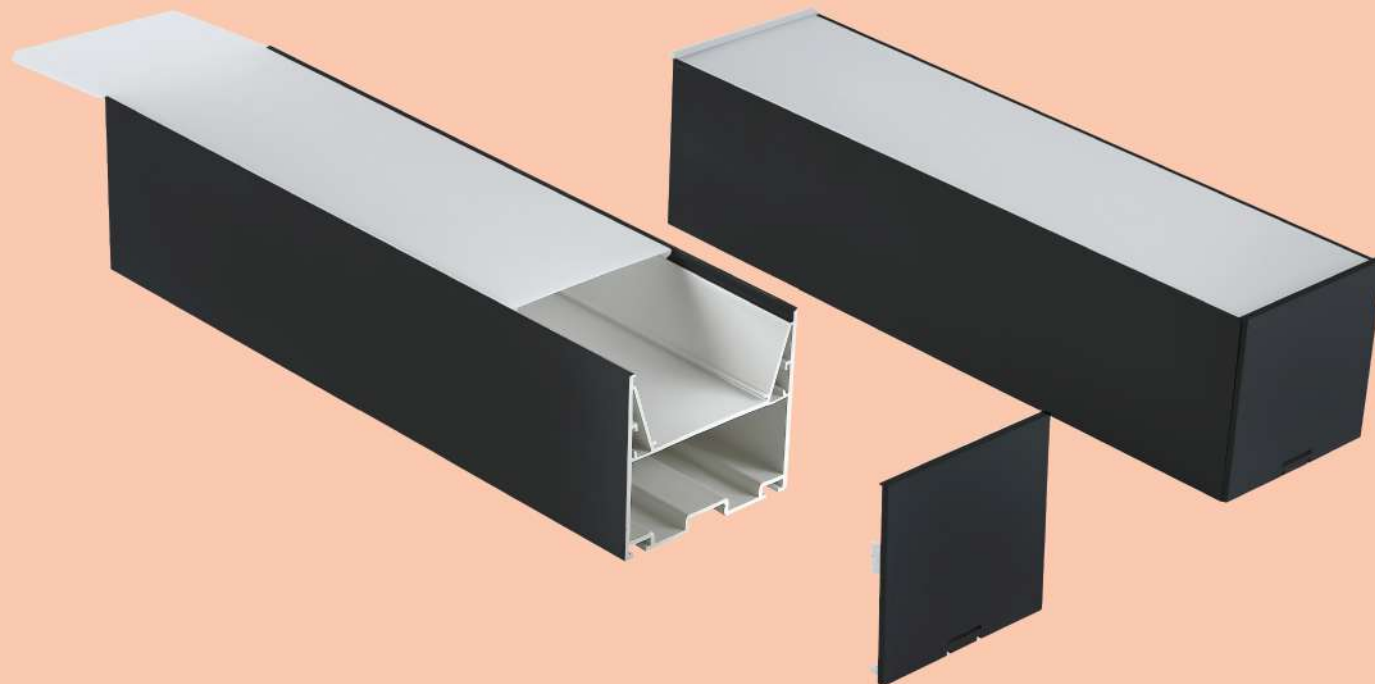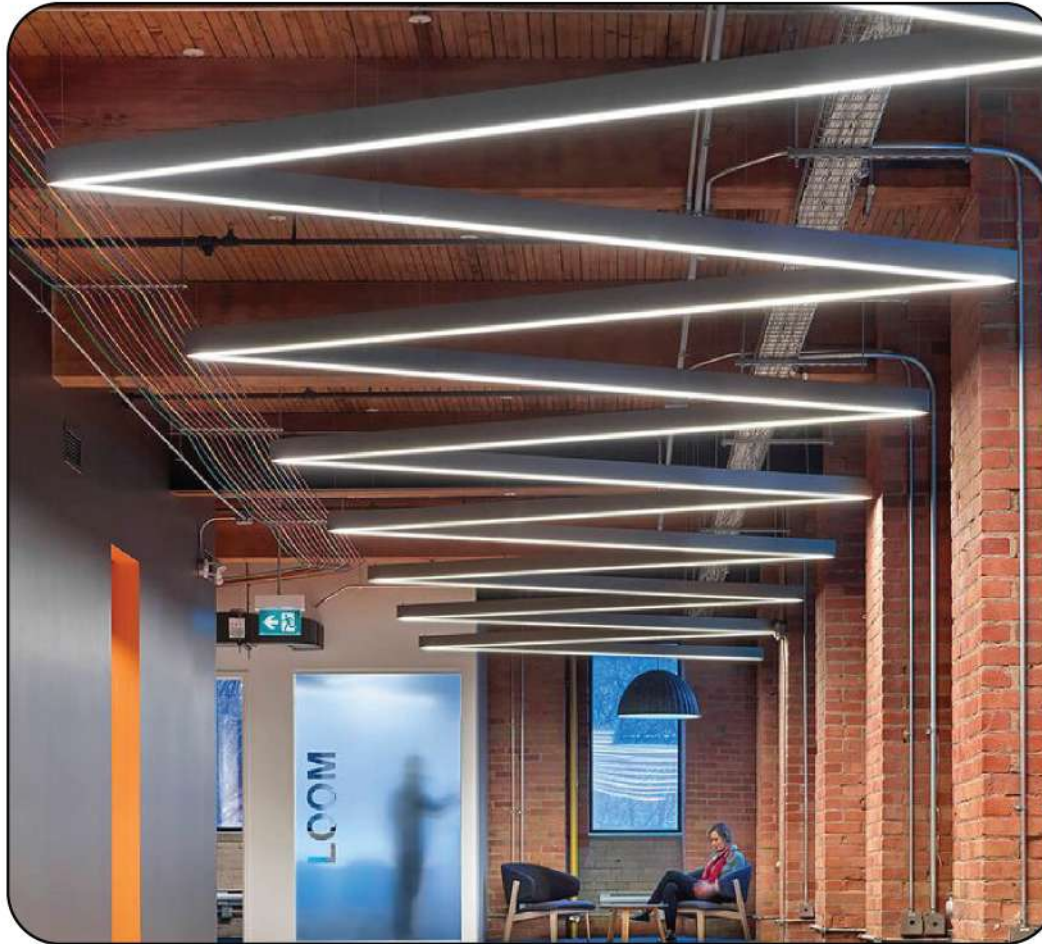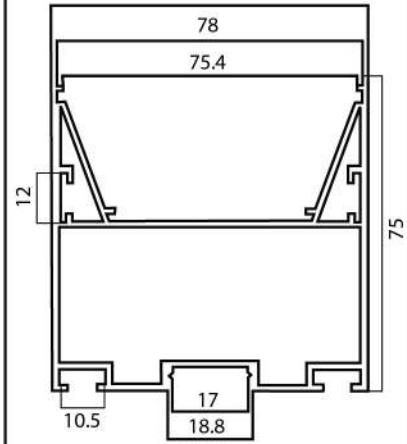

- **CCT:**
 - 3000k
 - 4000k
 - 6000K
 - 3000k-6000k

• Available Wire Color:

- Black
- White
- Clear

• Hanging Kit Color:

- Black
- Clear

- **Input Voltage:**
110v-240v / 50-60Hz

- **Wattage Range:**
24v-43v 1000Ma (4ft)

- **Operating Temperature:**
Capacity Upto 85°C

- **Beam Angle:** 120°
- **CRI:** Ra≥90

- **Lumens:**
110lums - 130lums
(3000k) - (6500k)

- **Wattage:**
40w/60w (4ft)

- **Power Factor:**
0.50/0.90

- **Sizes Available:**
1ft-16ft

• Drivers:




• Product Technology:




• LED Engine:



• Available Finish:



Sand Black



Sand White



Hermes Leather



Cherry Wood



White Oak



Rose Wood




Antique Brass



Antique Copper

More
300 Finish
Available
Against Order

SB-10075

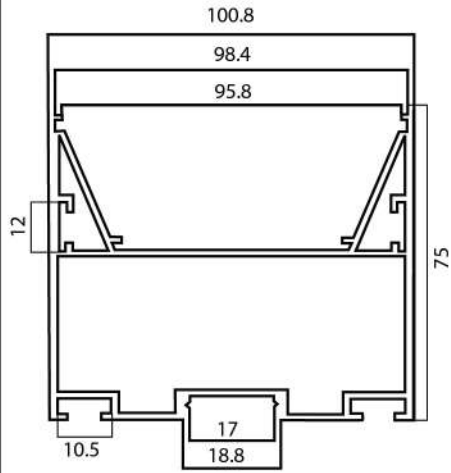

- **CCT:**
 - 3000k
 - 4000k
 - 6000K
 - 3000k-6000k

• Available Wire Color:

- Black
- White
- Clear

• Hanging Kit Color:

- Black
- Clear

- **Input Voltage:**
110v-240v / 50-60Hz

- **Wattage Range:**
24v-43v 1000Ma (4ft)

- **Operating Temperature:**
Capacity Upto 85°C

- **Beam Angle:** 120°
- **CRI:** Ra≥90

- **Lumens:**
110lums - 130lums
(3000k) - (6500k)

- **Wattage:**
40w/60w (4ft)

- **Power Factor:**
0.50/0.90

- **Sizes Available:**
1ft-16ft

• Drivers:



• Product Technology:



• LED Engine:




• Available Finish:





• **SIZE**

SB-15027

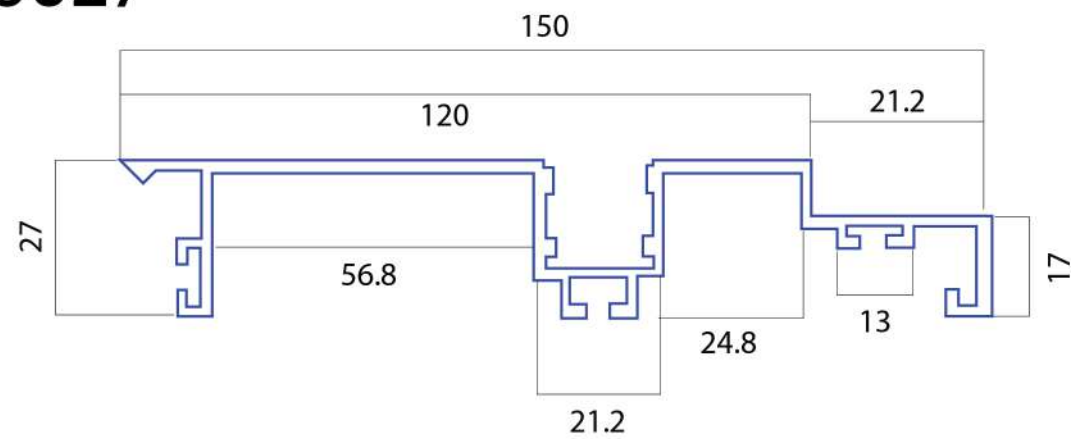


• **AVAILABLE COLORS**


Available in **3.6 meters** long length




Step.1 - Install the profile with the screw on required surface.

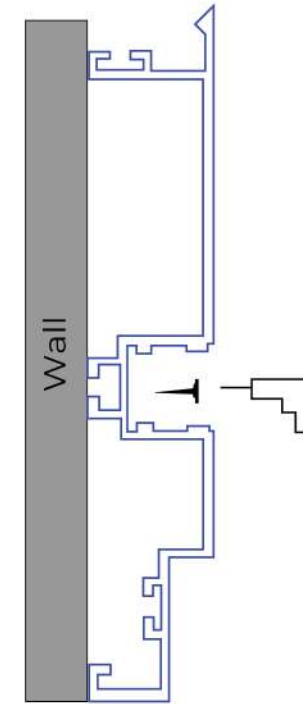


Step.2 - Install the COB strip on given profile.

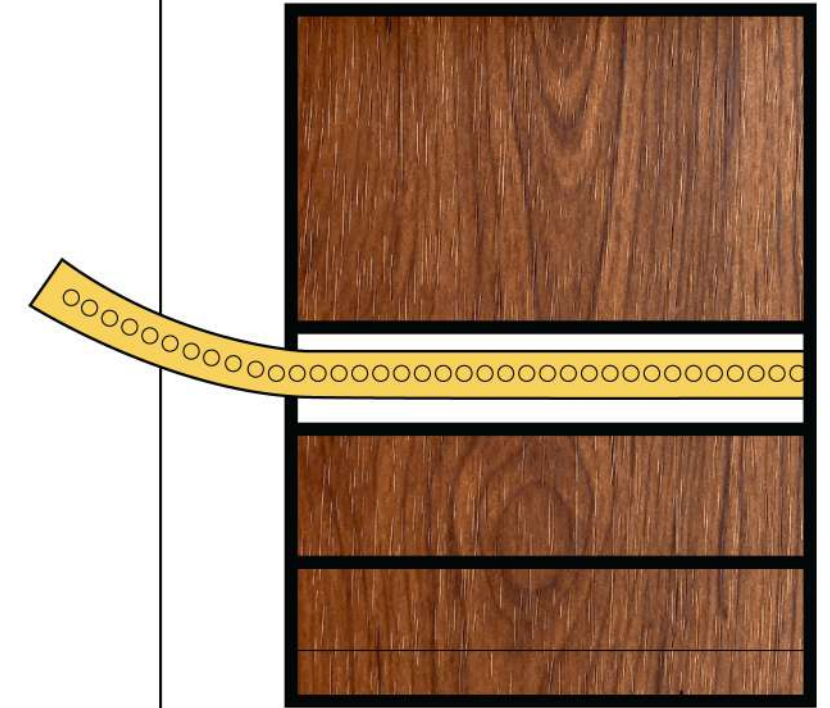

Step.3 - Connect COB strip with the driver and check the connection.

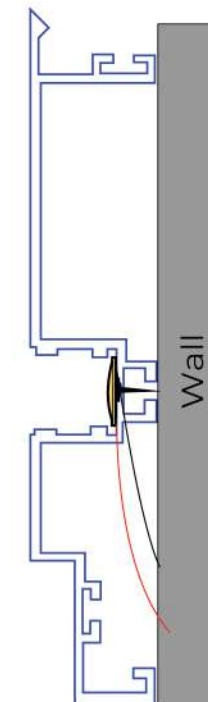


Step.4 - Attach the acrylic on given profile.

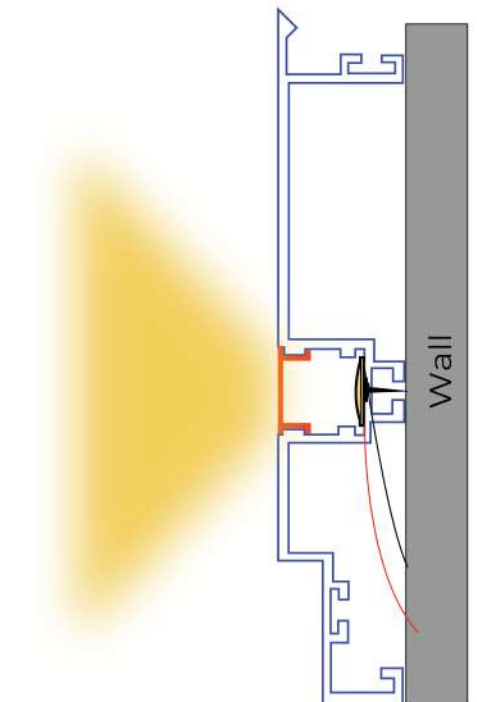





• **SIZE**

SB-8146

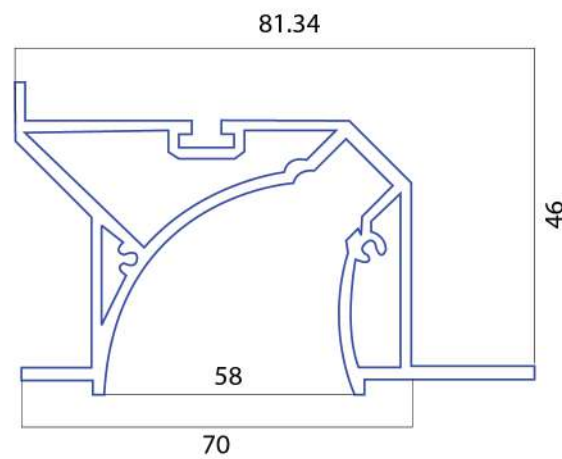


• **AVAILABLE COLORS**


Available in **3.6 meters** long length

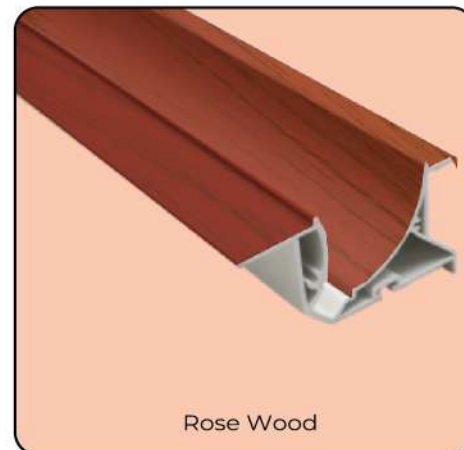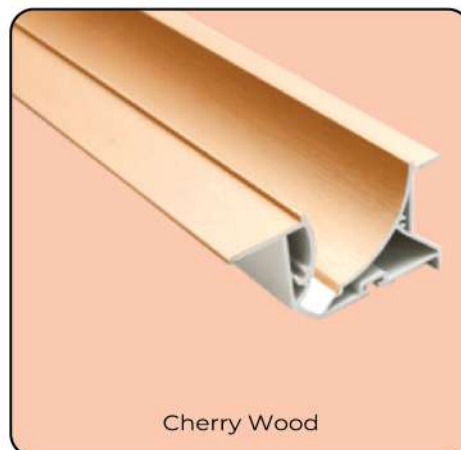


Step.1 - Check the size required to install the profile.

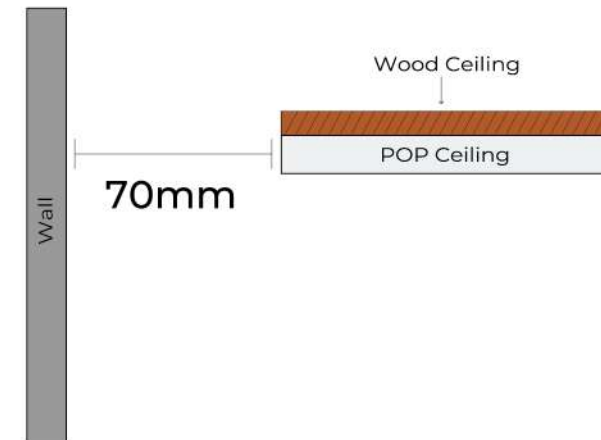


Step.2 - Add extension metal plate if required for a long length.

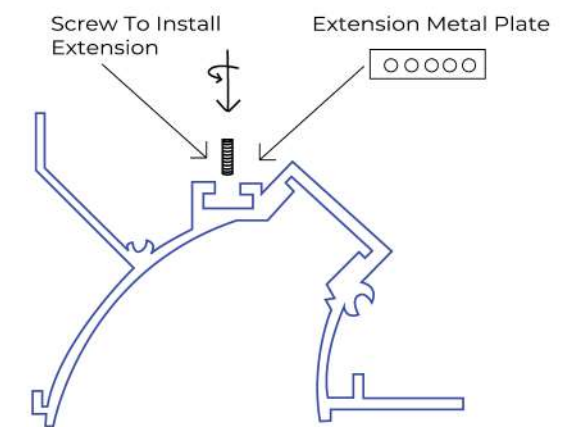


Step.3 - Install the COB strip on given profile.

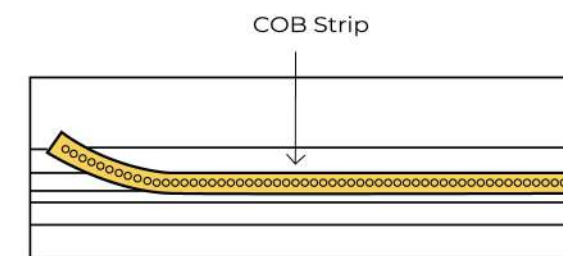


Step.4 - Connect COB strip with the driver and check the connection then attach the acrylic on given profile.

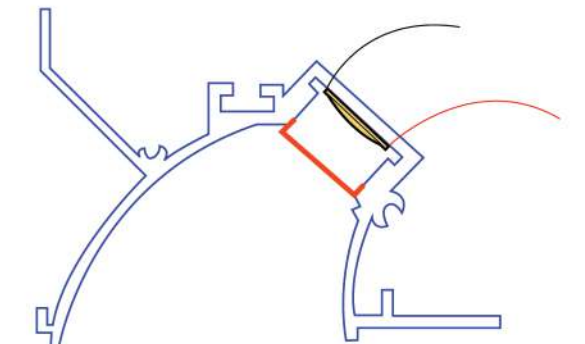

Step.5 - Install the profile with the screw on required surface.

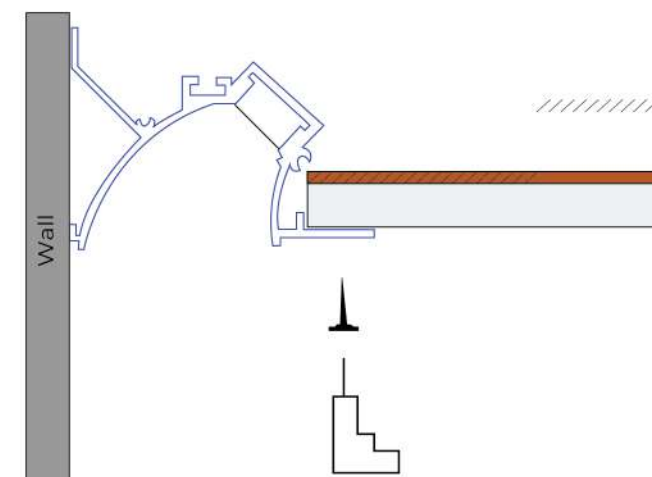

Step.6 - Now fill the POP on installed screw to give the final finish.

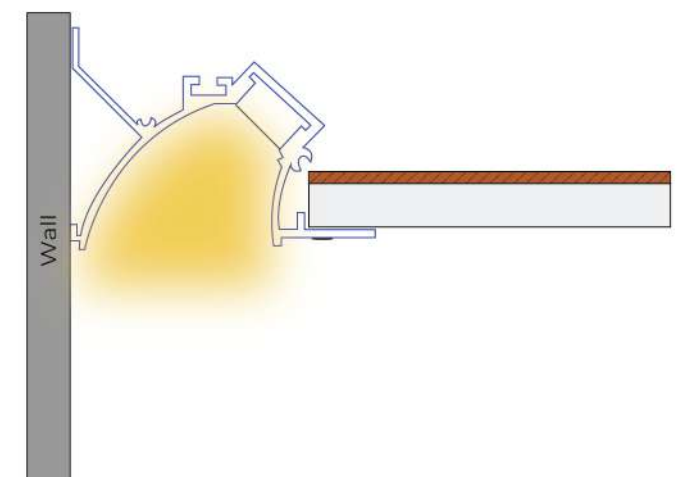


One profile, two styles



• SIZE

SB-12030

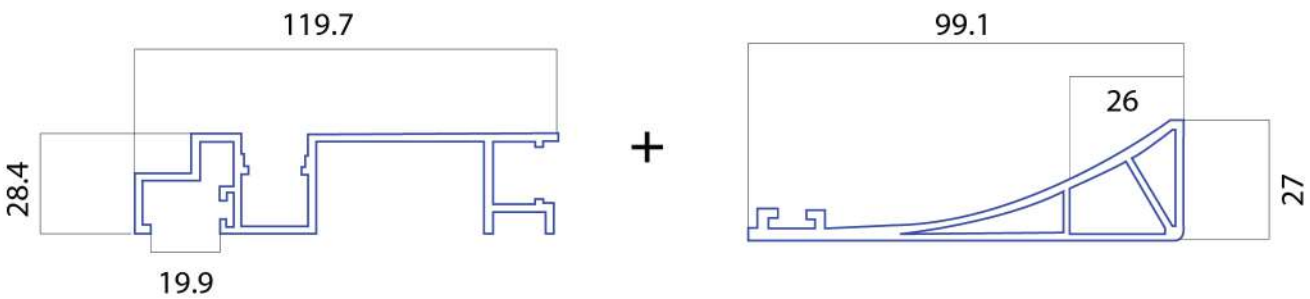

• AVAILABLE COLORS

Available in 3.6 meters long length



Cherry Wood




Rose Wood




White Oak

Style.1

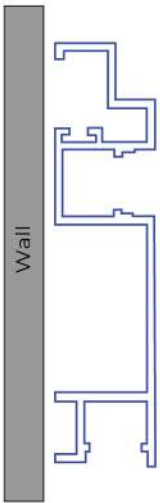


Style.2

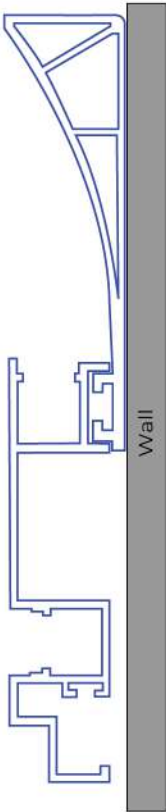


Step.1 - Install the profile with the screw on required surface.

Style.1

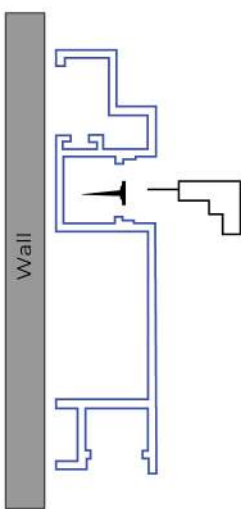


Style.2

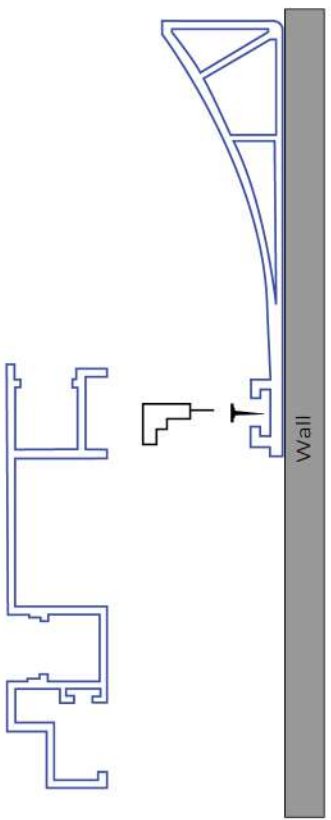


Step.2 - Connect COB strip with the driver and check the connection.

Style.1

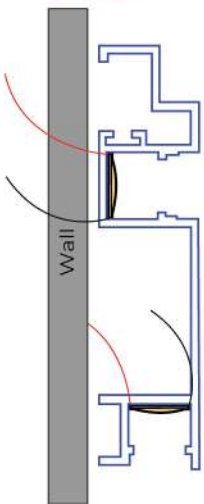


Style.2

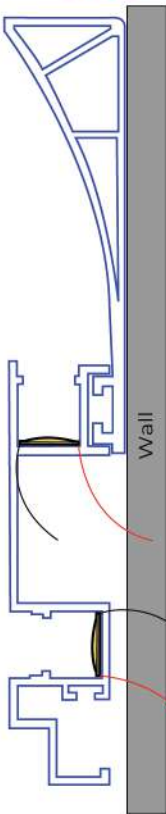


Step.3 - Attach the acrylic on given profile.

Style.1

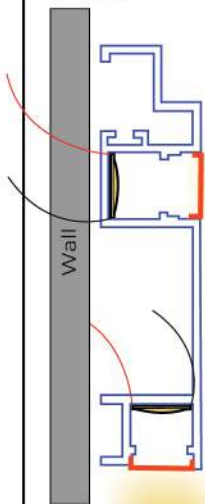


Style.2

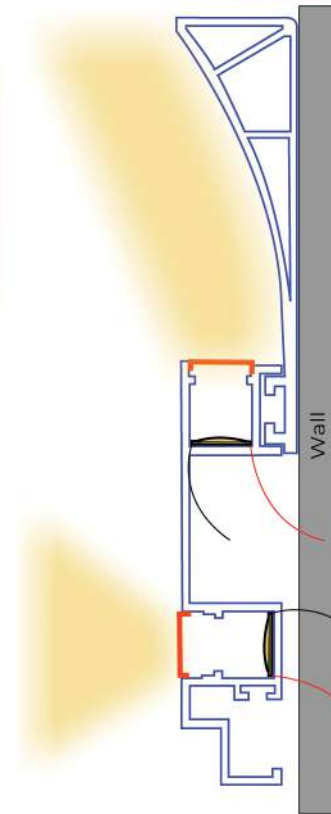



• **SIZE**

SB-9292

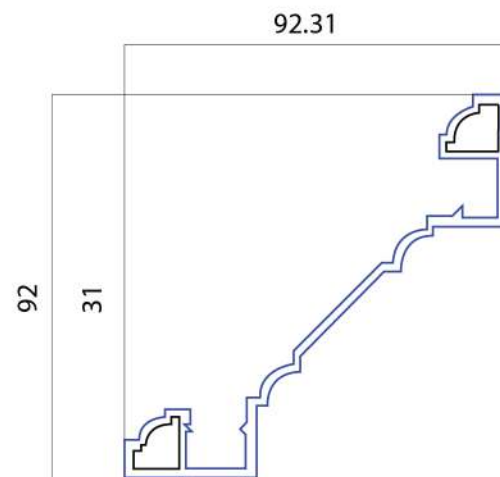


• **AVAILABLE COLORS**


Available in **3.6 meters** long length




Step.1 - Check the size required to install the profile.

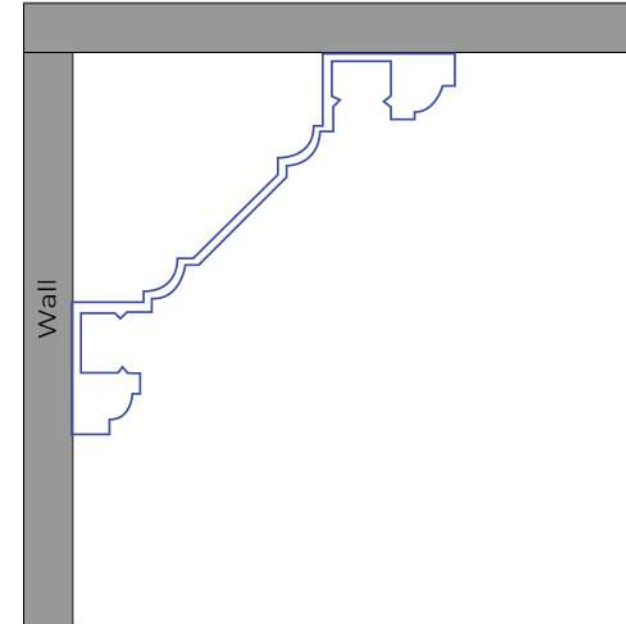

Step.2 - Install the profile with the screw on required surface.

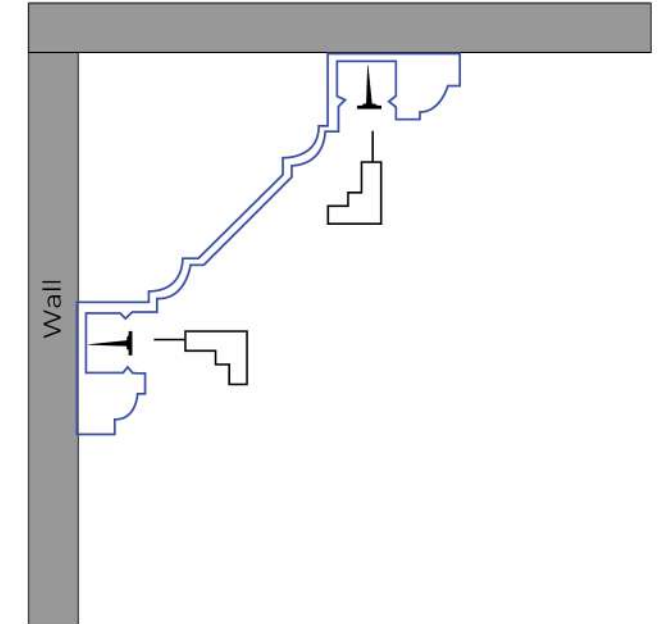

Step.3 - Connect COB strip with the driver and check the connection.

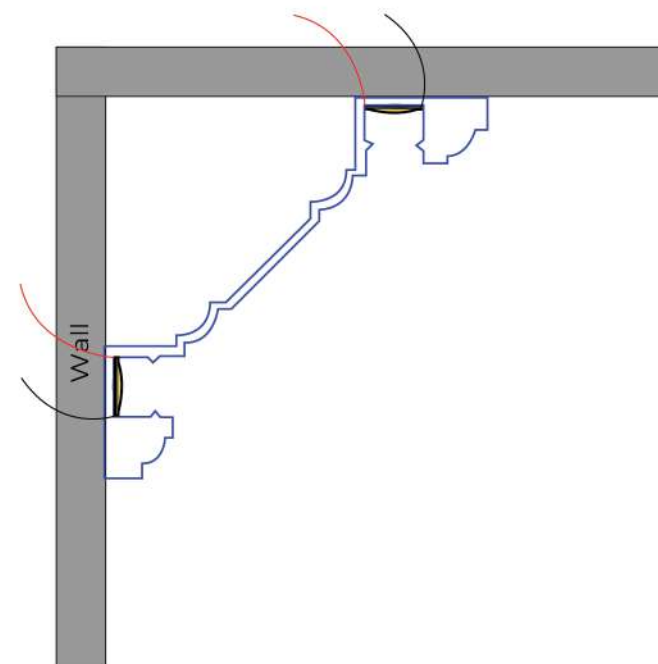

Step.4 - Attach the acrylic on given profile.

